

flow~mon

...simple flow solutions in a complicated world

Double Window Indicator Range Flap & Spout Visual Sight Indicator

This new double window Flow Indicator range from Flow-Mon is most useful where visual inspection of the pipeline content is needed as a plant safety or product quality measure. The sizeable windows allow an excellent view of the conditions in the line.

The plain Spout design affords visual inspection only while the hinged internal Flap with its graduated scale allows a check on flow rate changes and for instance, affords repeatability of valve positioning. The Flap or Spout can be used in transparent or slightly opaque solutions and gas services. Both units will operate in horizontal or vertical orientation (up only for Flap style).

The latest addition to our double flow indicator range, the spring flap design means that approximate nominal flow handling can be increased by up to three times. It is also the ideal addition for use in vertical lines where gravity prevents the use of an un-tensioned flap. It is available in multiple spring options depending on flow rate.

Materials of Construction

- Body & Covers**
- Stainless Steel 316: ASTM-A-351-2000 GR CF8M
 - Carbon Steel: ASTM-A-216-2000-GR-WCB
 - Bronze BS EN1982 CuSn5Zn5PB5-C-GS (formerly LG2)
- Glass**
- Toughened Borosilicate (DIN 7080) (16 bar) or Toughened Soda lime (BIS 3463) (40 bar)
- Gaskets**
- PTFE
- Flap**
- Stainless Steel 316
- Scale**
- Polycarbonate
- Fasteners**
- Stainless A2
- (Every effort will be made to meet any special connection and material requirements)*
- Temperature**
- up to 250°C



Pressure Rating 40Bar (subject to Glass & Flange specification)

Sizes BSP, NPT and Flanged connection: PN16, 40, Ansi150, 300

(other configurations also available)

Small	1/4"(8)	3/8"(10)	1/2"(15)	3/4"(20)	1"(25)
Medium	1 1/4"(32)	1 1/2"(40)	2"(50)		
Large	3"(80)	4"(100)			

All units are tested to 1.5 times the standard pressure limit applicable to the unit specification. Test and 3.1b material certification are available if applied for at order placement.

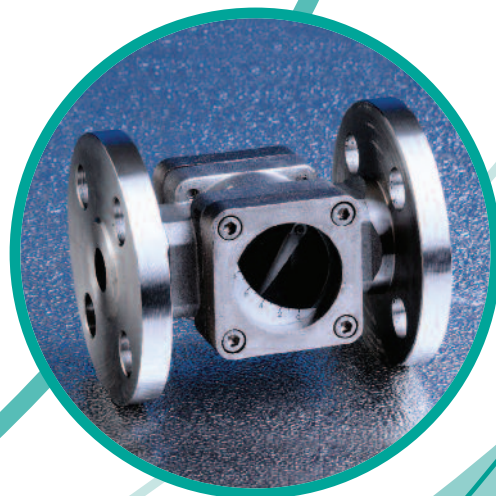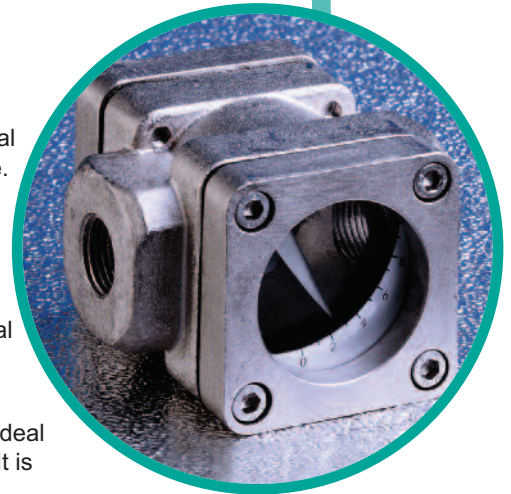

large

Materials of Construction

- Body & Covers** - Stainless Steel 316: ASTM-A-351-2000 GR CF8M
 - Carbon Steel: ASTM-A-216-2000-GR-WCB
 - Bronze BS EN1982 CuSn5Zn5PB5-C-GS (formerly LG2)
- Glass** - Toughened Borosilicate (DIN 7080) (16 bar) or Toughened Soda lime (BIS 3463) (40 bar)
- Gaskets** - PTFE
- Flap** - Stainless Steel 316
- Scale** - Polycarbonate
- Fasteners** - Stainless A2

(Every effort will be made to meet any special connection and material requirements)



Technical Information

Pressure Rating 40Bar (subject to Glass & Flange specification)

Dimensions (mm)

Scale (lpm)

Size	Weight (kg)	Length	Width	Height	Diameter (Window)	2	4	6	8	Top
80	19.5	258	160	165	100	24	32	52	128	220
100	23.5	258	160	165	100	46	70	100	150	220

T= Threaded F= Flanged

